

High quality European design. Excellent light output from 12 x 3W high power LEDs coupled with high intensity reflector. Clear visibility even in daylight

ECE R65 Class 1 approved. Voltage: 12-24V. Waterproof rated IP67. Shatterproof polycarbonate dome

Available in 3-bolt, Magnetic or Flexi-pole mounting versions. Magnetic mount cable: maximum length of 3 metres. 3 selectable flash patterns—rotating (default), flash, double flash



LBA-3B
3-Bolt Mount
H 132mm, Lens Dia 128mm, Max Dia 144mm




LBA-FLX
Flexi-Pole Mount
H 210mm, Lens Dia 128mm, Max Dia 130mm



LBA-M
Magnetic Mount
H 118mm, Lens Dia 128mm, Max Dia 144mm

ALTIFLASH LED WARNING BEACON

LBA-3B, LBA-M, LBA-FLX
High performance LED warning beacon

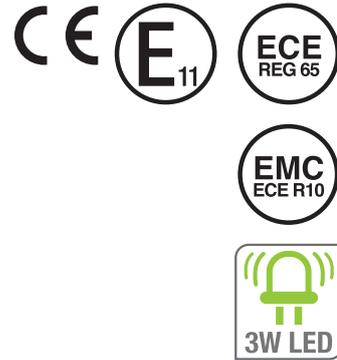

PERFORMANCE FEATURES

- + High quality European design
- + Excellent light output from 12 x 3W high power LEDs coupled with high intensity reflector
- + Clear visibility even in daylight
- + ECE R65 Class 1 approved
- + Voltage: 12-24V
- + Waterproof rated IP67
- + Shatterproof polycarbonate dome
- + Available in 3-bolt, Magnetic or Flexi-pole mounting versions
- + Magnetic mount cable: maximum length of 3 metres
- + 3 selectable flash patterns—rotating (default), flash, double flash
- + Flash pattern selection by internal switch, or switch-on-plug (magnetic mount version)
- + Includes mounting gasket and bolts
- + 2-year warranty

SUITABLE FOR

- + Agricultural vehicles
- + Refuse collection
- + Road maintenance
- + Mowing and weed spraying
- + Infrastructure maintenance
- + Surveying
- + Airports and transport hubs
- + Logistics
- + Construction